


L101 Xenon Beacon

L G M
PRODUCTS

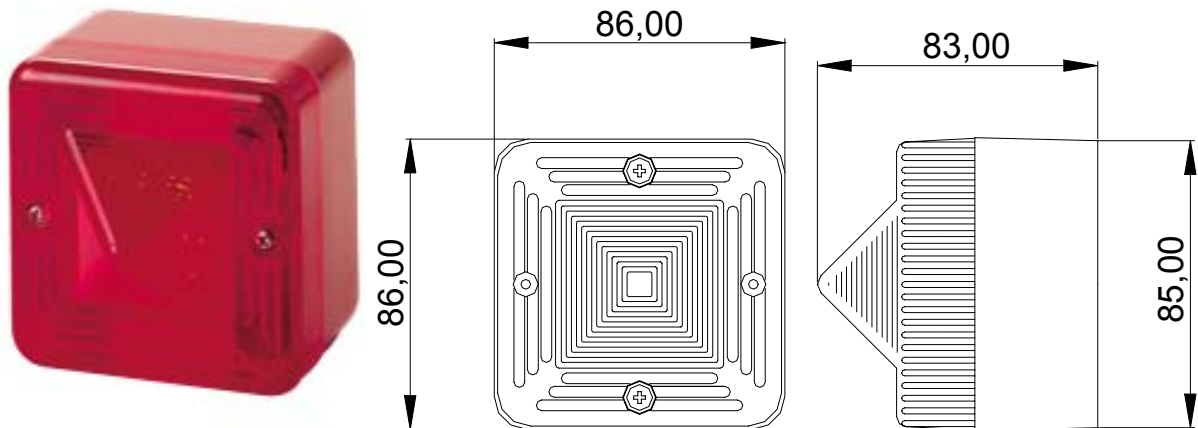

SPECIFICATION

| Voltage | Flash energy | Current mA | Weight Kg. | IP Rating | |
|---------|--------------|------------|------------|---------------------|---------------------------|
| 230 Vac | 5.0 | 35mA | 0.30 | WR version | 55 |
| 115 Vac | 5.0 | 70mA | 0.30 | Flash Rate | 1 Hz |
| 48Vac | 5.0 | 250mA | 0.30 | Max RH | 90% at 20 °C |
| 24Vac | 5.0 | 300mA | 0.30 | Storage temp | -40 to +70 °C |
| 12 Vac | 5.0 | 380mA | 0.30 | Op temp | -25 to +55 °C |
| 48Vdc | 5.0 | 175mA | 0.25 | Lens colour options | Amber, blue, clear |
| 24Vdc | 5.0 | 250mA | 0.25 | | green, opal, red, yellow |
| 12Vdc | 5.0 | 500mA | 0.25 | Base Colour options | Red, White, Grey |
| | | | | Terminal capacity | 0.5 to 4.0mm ² |
| | | | | Cable Entry | M20 knockouts |
| | | | | Lens Material | Polycarbonate |
| | | | | Base Material | UL94V0 & 5VA rated FR ABS |

APPROVALS:
UL America approved version available

ORDER CODE:
L101/Voltage option/Lens Colour option/Base Colour option/WR*/UL* optional

LGM PRODUCTS LTD
UNIT 18 RIVERSIDE INDUSTRIAL ESTATE
FARNHAM
SURREY GU9 7UG
UNITED KINGDOM

TEL +44 (0) 1252 725257
FAX +44 (0) 1252 727627
E-mail Sales@Lgmproducts.com
www.Lgmproducts.com