




- Light Output: 5 Joules
- IP Rating: 66
- Available Lens Colours: Amber, Blue, Clear, Green, Opal, Red, Yellow
- Available Voltages: 12Vdc 24Vdc 48Vdc
12Vac 24Vac 48Vac 115Vac 230Vac
- Tropicalisation available

Light source	Xenon Strobe
Flash energy	5 Joules
IP rating	66
Flash rate	1 Hz
Cable entry	M20 Knockouts
Terminal capacity	0.5 to 4.0mm ² cables
Max. RH	90% at 20°C
Operating temp.	-25°C to +55°C
Storage temp.	-40°C to +70°C
Body material	Flame retardant ABS
Body colour options	Grey, Red, White
Lens material	Flame retardant polycarbonate
Lens colour options	Amber, Blue, Clear, Green, Opal, Red, Yellow
Unit weight	0.2Kg

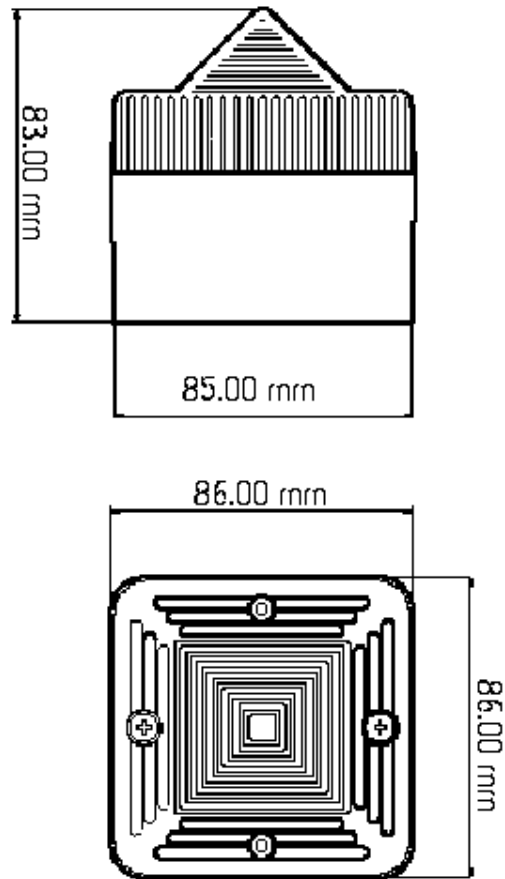

Approvals:
(specify required approval when ordering)
UL approved version available.
GOST-R certificate: POCC GB.JB05.B02228



Also available, the AL100 and SONFL1 as a combined sounder beacon

Voltage Options	Voltage tolerance	Current
12 Vdc	10 to 14 Vdc	500mA
24 Vdc	20 to 28 Vdc	300mA
48 Vdc	42 to 54 Vdc	250mA
12 Vac	+/- 10%	380mA
24 Vac	+/- 10%	300mA
48 Vac	+/- 10%	250mA
115 Vac	+/- 10%	70mA
230 Vac	+/- 10%	35mA