


# L101 LED & Filament Beacon DC Version

**L G M**  
**PRODUCTS**

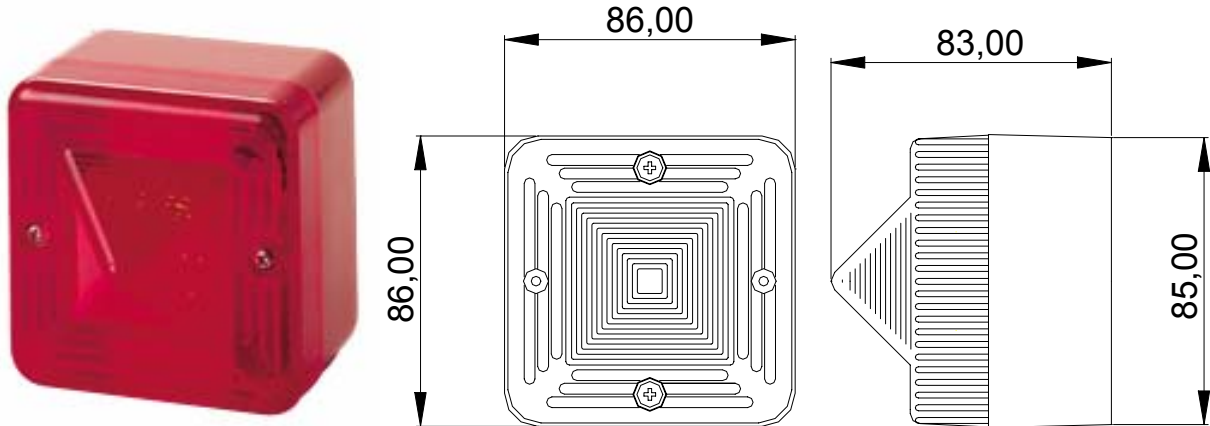

## SPECIFICATION

Voltage	Current mA	Current mA	Weight Kg.	IP Rating	55
	LED Version	Filament Bulb		WR version	56
230 Vac	27mA	15mA	0.30	Max RH	90% at 20 degC
115 Vac	54mA	30mA	0.30	Storage temp deg C	-40 to +70
24Vac	110mA	130mA	0.30	Op temp deg C	-25 to +55
				Base Colour options	Amber, blue, clear
48Vdc	100mA	65mA	0.25		green, opal, red, yellow
24Vdc	100mA	125mA	0.25	Base Colour options	Red, White
12Vdc	150mA	250mA	0.25	Terminal capacity	1 x 2.5 mm
The LED Version has an array of 8 high intensity LED's				Cable Entry	M20 knockouts
The filament bulb version is rated 3 watts				Base Material	UL94V0 & 5VA rated FR ABS
Both versions can be remotely switched from static to Blinking mode via input terminals					

### ORDER CODE:

L101/LED or BULB option/Voltage option/Lens Colour option/Base Colour option/WR if required

**LGM PRODUCTS LTD**  
**UNIT 18 RIVERSIDE INDUSTRIAL ESTATE**  
**FARNHAM**  
**SURREY GU9 7UG**  
**UNITED KINGDOM**

**TEL +44 (0) 1252 725257**  
**FAX +44 (0) 1252 727627**  
**E-mail Sales@Lgmproducts.com**  
**www.Lgmproducts.com**