V4 LED Beacon

L G M
PRODUCTS

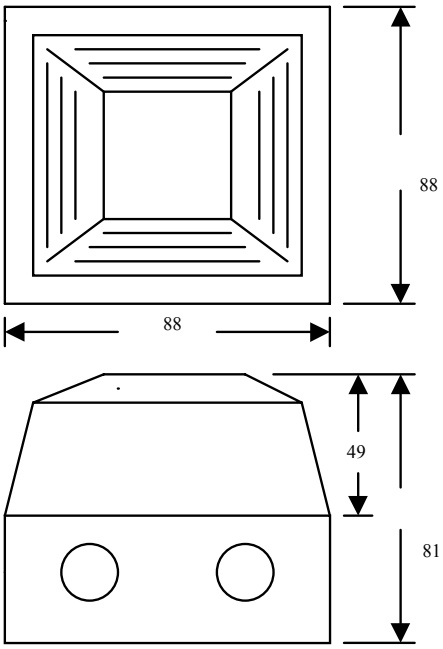

SPECIFICATION

Voltage	Current mA	Weight Kg.
12 or 24Vdc	30	0.20

IP Rating	65
Flash Rate	1Hz
Max RH	90% @40ºC
Storage temp deg C	–40 to +70
Op temp deg C	–25 to +40
Lens colour options	Amber, Red
LED array options	8 or 12 arrays
Base Colour options	Red RN (non flame retardant red), White
Terminal capacity	1 x 2.5 mm2
Cable Entry	M20 knockouts
Lens Material	Polycarbonate
Base Material	ABS

MAIN FEATURES

Rated for continuous operation

Steady, continuously on version available

ORDER CODE: V4LED/Flash or Steady/Voltage option/LED array option/Lens Colou/Base Colour

LGM PRODUCTS LTD
UNIT 18 RIVERSIDE INDUSTRIAL ESTATE
FARNHAM
SURREY GU9 7UG
UNITED KINGDOM

TEL +44 (0) 1252 725257
FAX +44 (0) 1252 727627
E-mail Sales@Lgmproducts.com
www.Lgmproducts.com