




- Output: 119dB(A)
- 45 Tone, 3 Stages
- IP Rating: 66
- Available Voltages: 24Vdc 48Vdc 110Vdc
24Vac 115Vac 230Vac

Max. sound output	119dB
Nominal sound output	112dB
IP rating	66
Alarm tones	45
Alarm stages	3
Stage switching	Negative or optional Positive Reverse polarity stage switching on DC units
Volume control	available
Cable entry	2 x M20
Terminal capacity	0.5 to 4.0mm ² cables
Max. RH	90% at 20°C
Operating temp.	-25°C to +55°C
Storage temp.	-40°C to +70°C
Body material	Flame Retardant ABS
Colour options	Grey, Red, White
Unit weight	1.8Kg (DC) 2.1Kg (AC)

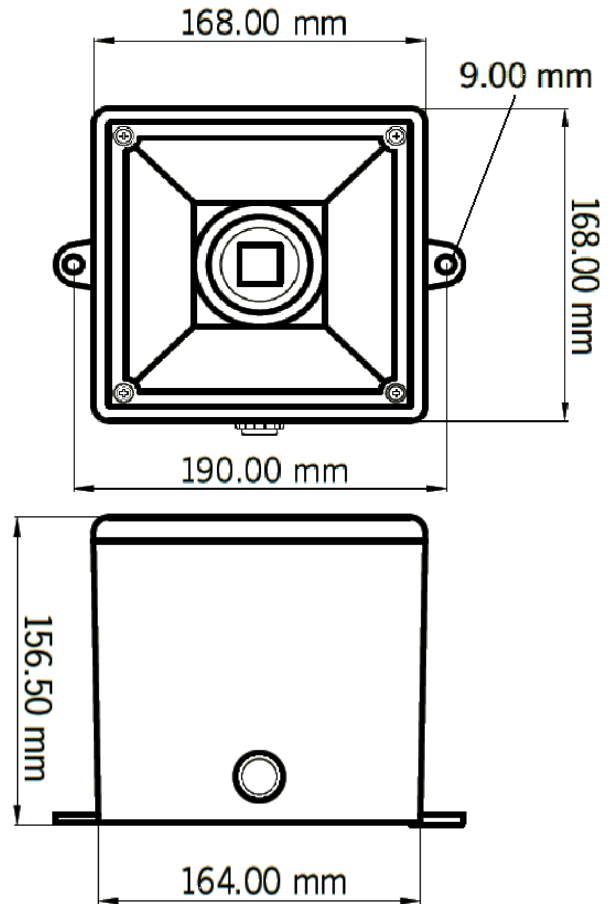

Approvals:
(specify required approval when ordering)
VdS approved to EN54-3 (CPD 89/106/EEC)
UL America approved version available
GOST-R approved. Cert: POCC GB-JB05-B02228
UKOOA/PFEER compliant alarm tones

Voltage options	Voltage tolerance	Current
24 Vdc	10 to 30 Vdc	200mA
48 Vdc	35 to 60 Vdc	120mA
100 Vdc	90 to 250 Vdc	60mA
24 Vac	+/- 10%	500mA
115 Vac	+/- 10%	100mA
230 Vac	+/- 10%	60mA



Also available, the AL112N with Xenon beacon.