



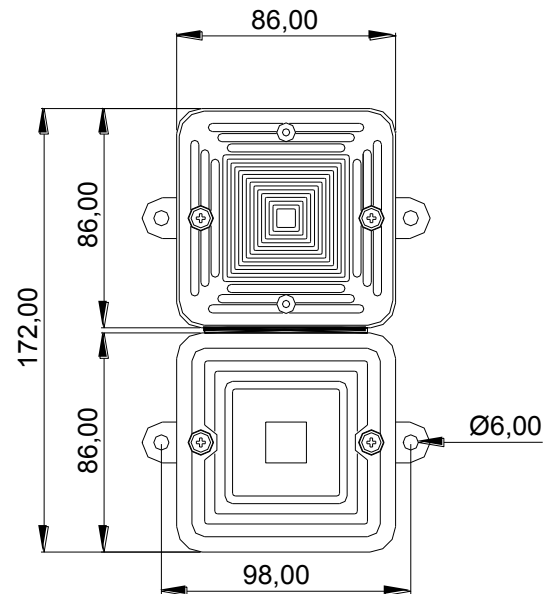

- Sound Output: 104dB(A)
- Light Output: 5 Joules
- 32 Tone, 3 Stage Alarm
- IP Rating: 56
- Available Lens Colours: Amber, Blue, Clear, Green, Opal, Red & Yellow
- Available Voltages: 24Vdc 48Vdc  
24Vac 115Vac 230Vac

<b>Max. sound output</b>	104dB
<b>Nominal sound output</b>	100dB
<b>IP rating</b>	56
<b>Alarm tones</b>	32
<b>Alarm stages</b>	3
<b>Stage Switching</b>	Negative Reverse polarity stage switching on DC units
<b>Volume control</b>	Available
<b>Light source</b>	Xenon strobe
<b>Flash energy</b>	5 Joules
<b>Flash rate</b>	1 Hz
<b>Body material</b>	UL94VO FR ABS
<b>Body Colour options</b>	Grey, Red, White
<b>Lens material</b>	Polycarbonate
<b>Lens colour options</b>	Amber, Blue, Clear, Green, Opal, Red & Yellow
<b>Cable entry</b>	4 x M20 knockouts
<b>Terminal capacity</b>	0.5 to 1.5mm <sup>2</sup> cables
<b>Max. RH</b>	90% at 20°C
<b>Operating temp.</b>	-25°C to +55°C
<b>Unit weight</b>	0.46Kg (DC) 0.57Kg (AC)

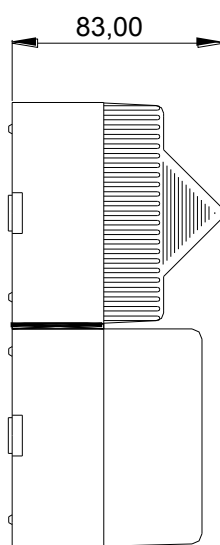

<b>Voltage Options</b>	<b>Voltage tolerance</b>	<b>Current</b>
24 Vdc	20 to 28 Vdc	275mA
48 Vdc	42 to 54 Vdc	225mA
24 Vac	+/- 10%	340mA
115 Vac	+/- 10%	90mA
230 Vac	+/- 10%	50mA

**Approvals:**

VdS approved to EN54-3 (CPD 89/106/EEC)  
UL America approved version available  
GOST-R approved. Cert: POCC GB-JB05-B02228  
UKOOA/PFEER compliant alarm tones



Also available as the A100  
alarm sounder only.