


CXL Callpoint

Universal Callpoint with LED Indicator

L G M
PRODUCTS

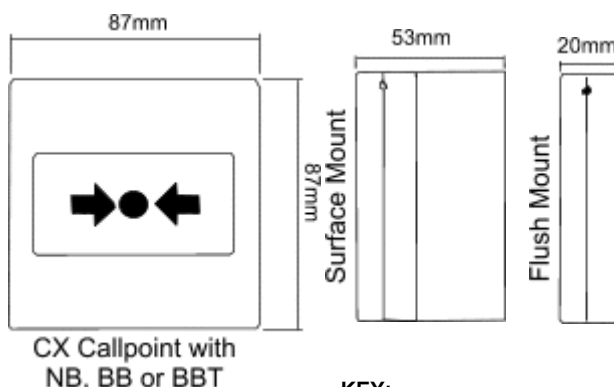

KEY:

NB = No Backbox
BB = Standard Back Box
BBT = Standard Back Box with Terminals

SPECIFICATION

Operating Method	Glass frangible Element with printed plastic safety film —OR— Resettable plastic element with integral alarm indicator	Contacts	Normally Open
IP Rating (WR Version)	42 (66)	Contact rating	24Vdc Systems
Weight	0.2kg	Monitoring	470R or 680R resistor (selected by connection)
Test Facility	Key	Connections	6-way terminal block
		Temperature Range	-25°C to + 55°C
		Construction	Flame Retardant ABS

ORDER CODE:

CXL /Element/Colour/Back Box/Cover (optional)

e.g. CXL GP/G/R/BB/PC = CXL GP Universal Callpoint, glass element, Red Colour, standard back box, polycarbonate cover

Element Options: G = Glass element
P = Resettable plastic element

Colour Options: R = Red (to EN51 for all European Fire Alarm applications)
G = Green
B = Blue
Y = Yellow
W = White

Back Box Options: NB = No Back Box
BB = Standard Back Box
BBT = Back Box with Terminals

Cover (optional) PC = Polycarbonate Cover
PC/TI = Polycarbonate Cover with security tie
(Leave blank for no cover)

For all other call point options please see the Callpoint Accessories datasheet.

LGM PRODUCTS LTD
UNIT 18 RIVERSIDE INDUSTRIAL ESTATE
FARNHAM
SURREY GU9 7UG
UNITED KINGDOM

TEL +44 (0) 1252 725257
FAX +44 (0) 1252 727627
E-mail Sales@Lgmproducts.com