



Turbo Star EL Series

Xenon Beacon

L G M
PRODUCTS

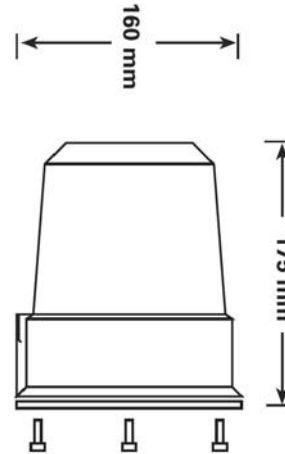

Drilling for Panel Mounting (ISO 4148)

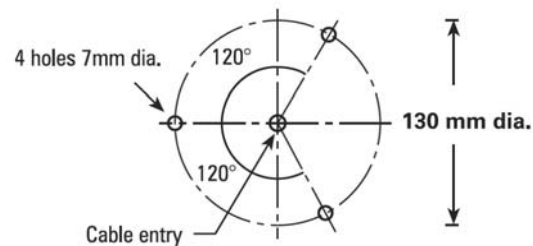

SPECIFICATION

Voltage	Voltage Tolerance	Flash Energy	Current Amps	Weight Kg.	IP Rating	IP65*
230Vac	207-253	15W	0.65	0.6	Flash Rate	2Hz
110Vac	90-125	15W	1.36	0.6	Op temp deg C	-20°C to +50°C
24 Vdc	11 to 36	15W	0.7	0.6	Lens colour options	Clear, Amber, Red, Blue and Green
12 Vdc	11 to 36	15W	1.5	0.6	Base Colour	Black
					Lens Material	Polycarbonate
					Base Material	ABS

ORDER CODE:

AC Versions: EL2S/Voltage/ Lens Colour
DC Versions ELU2DXDV/15/ Lens colour

*** When fitted flush against flat surface**

Vibration protected circuit suitable for rough service applications

LGM PRODUCTS LTD
UNIT 18 RIVERSIDE INDUSTRIAL ESTATE
FARNHAM
SURREY GU9 7UG
UNITED KINGDOM

TEL +44 (0) 1252 725257
FAX +44 (0) 1252 727627
E-mail Sales@Lgmproducts.com
www.Lgmproducts.com