



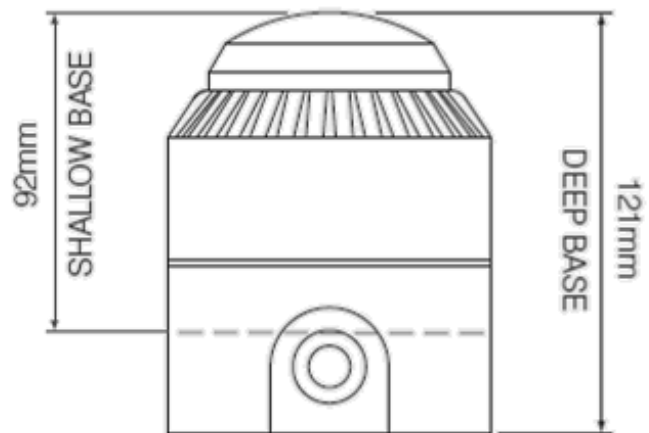

- Sound Output: 103dB(A)
- Light Output: 0.7 Joules
- 32 Tone, 2 Stage Alarm
- IP Rating: 54/66
- Available Lens Colours: Amber, Blue, Clear, Red
- Available Voltages: 12Vdc 24Vdc
115Vac 230Vac

Sound output	103dB (12Vdc) 101dB (24Vdc)
Alarm tones	32 (preset single tone version available)
Alarm stages	2
Volume control	10dB
Light source	Xenon strobe
Flash energy	0.7 Joules
Flash rate	1Hz
IP rating	54 (shallow base) 65 (deep base, powered base, U base)
Cable entry	Cut-outs (shallow base) M20 Knockouts (deep/U Base)
Terminal capacity	0.5 to 2.5mm ² cables
Operating temp.	-10°C to +55°C
Body material	ABS
Body colour options	Red, White
Lens material	Polycarbonate
Lens colour options	Amber, Blue, Clear, Green, Red
Base options	Shallow base (DC) Deep base (DC) U base (DC) Powered deep base (AC)
Unit weight	0.33Kg (Shallow base) 0.43Kg (Deep base)

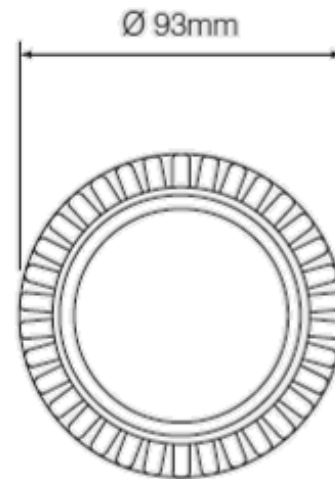

Approvals:
(specify required approval when ordering)
EN54-3 compliant.

Voltage options	Voltage tolerance	Current
12 Vdc	9 to 15 Vdc	110mA
24 Vdc	18 to 28 Vdc	68mA