
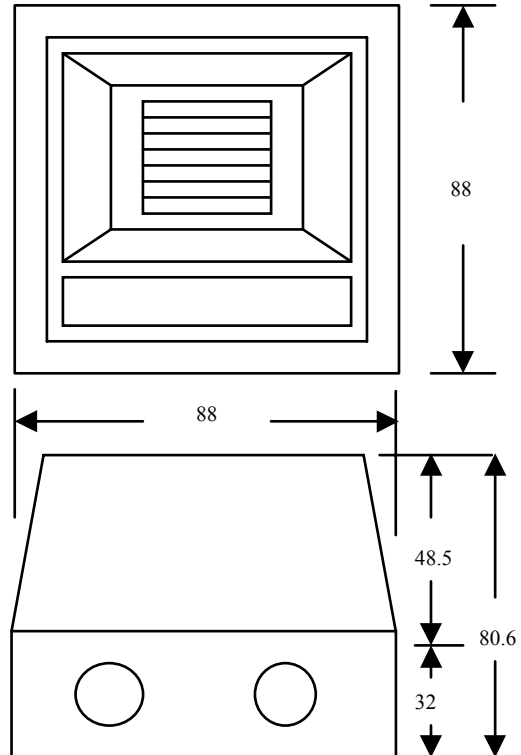


LC Sounder

L G M
PRODUCTS

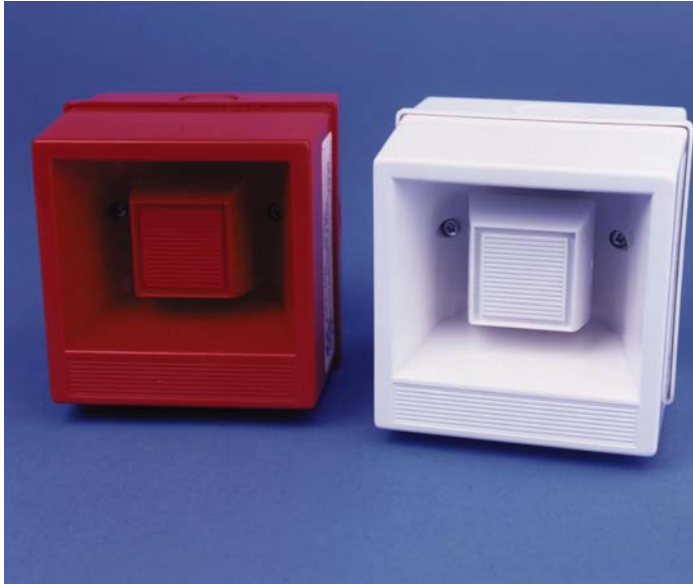

Voltage Options	Voltage tolerance	Current mA*	Weight Kg.
24 Vdc	12-35 Vdc	30	0.25

***NOTE:** Sound output and current consumption values are based on the 800 to 1000 Hz alternating signal, the standard UK fire alarm tone. These values will vary for other alarm tones

ORDER CODE:
LC/Voltage /Base Colour

LGM PRODUCTS LTD
UNIT 18 RIVERSIDE INDUSTRIAL ESTATE
FARNHAM
SURREY GU9 7UG
UNITED KINGDOM

Sound output * 100 dB(A)

IP Rating	54
Alarm tones	2
Alarm Stages	1
Volume Control	no
Cable entry	M20 knockouts
Terminal Capacity	1 x 2.5 mm ²
Max RH	95% at 40 °C
Op Temp	-25 to +55 °C
Storage temp	-40 to +70 °C
Body Material	ABS
Body Colour Option	Red or white

TEL +44 (0) 1252 725257
FAX +44 (0) 1252 727627
E-mail Sales@Lgmproducts.com
www.Lgmproducts.com