
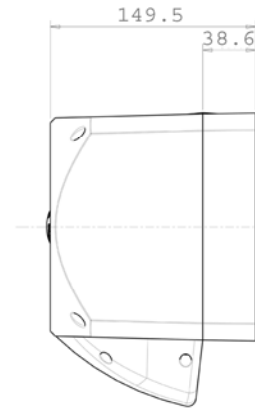


# NEXUS 110

## Combined Sounder Beacon

**L G M**  
**PRODUCTS**

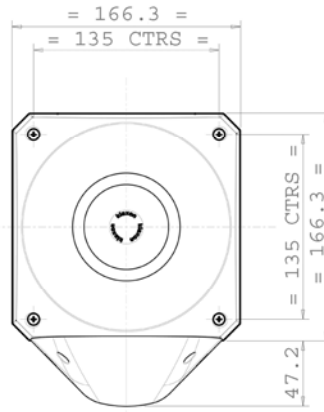

### SPECIFICATION

Voltage Options	Voltage tolerance	Current mA
110 /230 Vac	+/- 10%	250 mA max
24 Vdc	10 to 60 Vdc	260 to 300mA

**Sound output at 1 metre**      **110B(A)**

<b>IP Rating</b>	66
<b>Alarm tones</b>	64
<b>Alarm Stages</b>	3
<b>Volume Control</b>	Yes
<b>Cable entry</b>	M20 knockouts
<b>Terminal Capacity</b>	2 x 2.5 mm <sup>2</sup>
<b>Op temp deg C</b>	-25 to +55
<b>Storage temp deg C</b>	-40 to +70
<b>Body Material</b>	UL94VO FR ABS

### Beacon Specification

<b>Flash Rate</b>	1 Hz
<b>Flash energy</b>	5 joules

<b>Lens Material</b>	Polycarbonate
<b>Lens colour options</b>	Red Amber, blue, clear green
<b>Weight</b>	2.25kg

**LGM PRODUCTS LTD**  
**UNIT 18 RIVERSIDE INDUSTRIAL ESTATE**  
**FARNHAM**  
**SURREY GU9 7UG**

V04.07

**TEL +44 (0) 1252 725257**  
**FAX +44 (0) 1252 727627**