



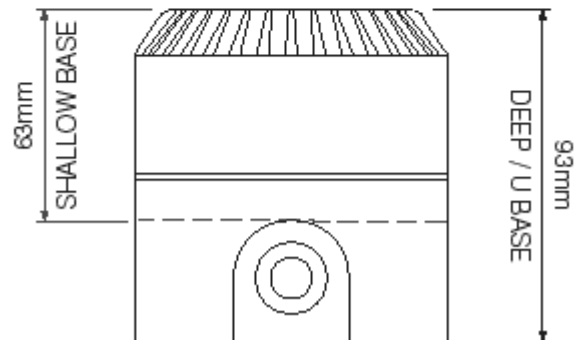

- Sound Output: 102dB(A)
- 32 Tone, 2 Stage Alarm
- IP Rating: 54/65
- Available Voltages: 12Vdc 24Vdc  
115Vac 230Vac

<b>Sound output</b>	102dB
<b>Alarm tones</b>	32
<b>Alarm stages</b>	2
<b>Volume control</b>	10dB
<b>IP rating</b>	54 (shallow base) 65 (deep base, powered base, U base)
<b>Cable entry</b>	Cut-outs (shallow base) M20 Knockouts (deep/U Base)
<b>Terminal capacity</b>	0.28 to 2.5mm <sup>2</sup> cables
<b>Operating temp</b>	-25°C to +70°C
<b>Body material</b>	ABS
<b>Colour options</b>	Red, White
<b>Base options</b>	Shallow base (DC) Deep base (DC) U base (DC) Powered deep base (AC)
<b>Unit weight</b>	0.25Kg (shallow base) 0.35Kg (deep, powered & U bases)

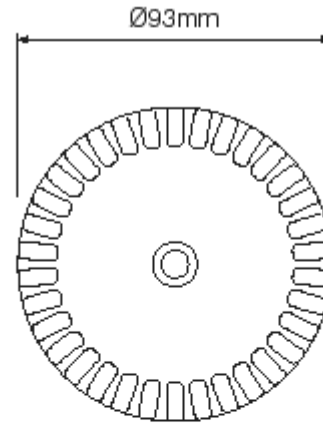

**Approvals:**  
**(specify required approval when ordering)**

Exceeds EN54-3 minimum requirements.  
CPD certified.  
EMC certified.  
LPBC certified.  
VdS certified.

<b>Voltage options</b>	<b>Voltage tolerance</b>	<b>Current</b>
12 Vdc	9 to 28 Vdc	32.0mA
24 Vdc	9 to 28 Vdc	16.0mA
110/230 Vac	+/- 10%	35.0mA

Available for use with 115Vac and 230Vac power supplies by using the powered base. Please see the powered base data sheet for details.



Roshni LP sounders are a perfect match for the Roshni LP Maxi units in locations where required sound output varies.