



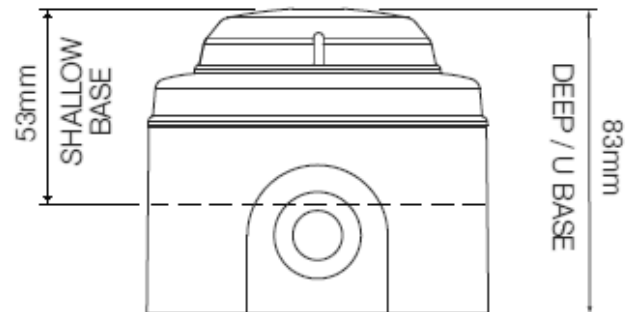

- Light Output: 0.5/1/3 Cd.
- IP Rating: 54/66
- Available Lens Colours: Amber, Blue, Clear, Green, Red
- Available Voltages: 12Vdc 24Vdc 48Vdc  
115Vac 230Vac

<b>Light source</b>	LED array
<b>Light output</b>	0.5/1/3 Cd. (user selectable)
<b>Flash options (user selectable)</b>	Single @ 1Hz Double @ 1 Hz Steady
<b>IP rating</b>	54 (shallow base) 65 (deep, powered, U base)
<b>Cable entry</b>	Cut-outs (shallow base) M20 Knockouts (deep, powered, U base)
<b>Terminal capacity</b>	0.5 to 2.5mm <sup>2</sup> cables
<b>Operating temp.</b>	-10°C to +55°C
<b>Body material</b>	ABS
<b>Body colour options</b>	Red, White
<b>Lens material</b>	Polycarbonate
<b>Lens colour options</b>	Amber, Blue, Clear, Green, Red
<b>Base options</b>	Shallow base (DC) Deep base (DC) U base (DC) Powered deep base (AC)
<b>Unit weight</b>	0.1Kg (Shallow base) 0.2Kg (Deep base)

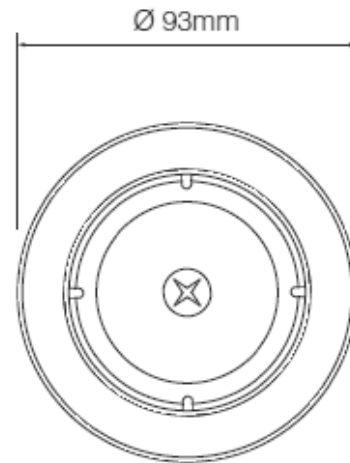

**Approvals:**  
**(specify required approval when ordering)**  
EN54-3 compliant.  
Manufacturer's declarations available on request.

<b>Voltage options</b>	<b>Voltage tolerance</b>	<b>Current (dependant on flash setting)</b>
12 Vdc	9 to 60 Vdc	7/11/32mA
24 Vdc	9 to 60 Vdc	3/5/15mA
48 Vdc	9 to 60 Vdc	2/3/8mA

Available for use with 115Vac and 230Vac power supplies by using the powered base. Please see the powered base data sheet for details.



The RoLP Maxi Solista allows both an audible and visual alarm to be provided with only a single installation point.