


YL4 beacon sounder

DC & AC Versions

L G M
PRODUCTS



Two retained screws for securing to back box

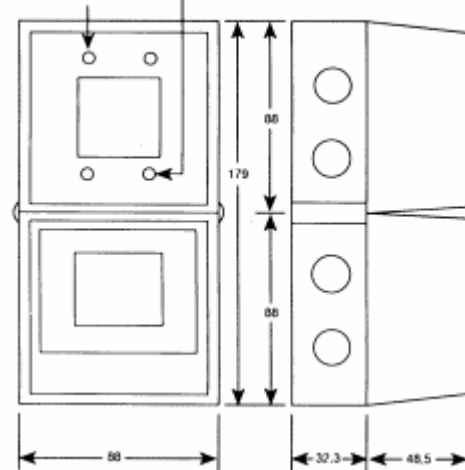

SPECIFICATION

Voltage Options	Voltage tolerance	Current mA*	Weight Kg.	Flash Energy	Sound output *	102 dB(A)
230 Vac	+/- 10%	48	0.57	5J	IP Rating	54
115 Vac	+/- 10%	95	0.57	5J	IP Rating WR version	65
24 Vdc	+/- 10%	285	0.50	5J	Alarm tones	32
12 Vdc	+/- 10%	370	0.50	5J	Alarm Stages	2
					Volume Control	18 dB(A) adjustment
					Cable entry	M20 Knockout
					Terminal Capacity	1 x 2.5 mm ²
					Max RH	95% at 40 °C
					Op Temp	-25 to +55 °C
					Storage Temp	-40 tp +70 °C
					Body Material	ABS
					Body colour options	Red or white
					Lens Material	Polycarbonate plastic
					Lens colour options	Amber, blue, clear green, opal, red
					Flash Rate	1 Hz

***NOTE:** Sound output and current consumption values are based on the 800 to 1000 Hz alternating signal, the standard UK fire alarm tone. These values will vary for other alarm tones

APPROVALS:
Vds Germany approved version available

ORDER CODE:
YL4/Voltage /Body colour /Lens colour WR version*/Vds*
*optional

LGM PRODUCTS LTD
UNIT 18 RIVERSIDE INDUSTRIAL ESTATE
FARNHAM
SURREY GU9 7UG
UNITED KINGDOM

TEL +44 (0) 1252 725257
FAX +44 (0) 1252 727627
E-mail Sales@Lgmproducts.com
www.Lgmproducts.com