


# YO4 sounder

## DC & AC Versions

**L G M**  
**PRODUCTS**

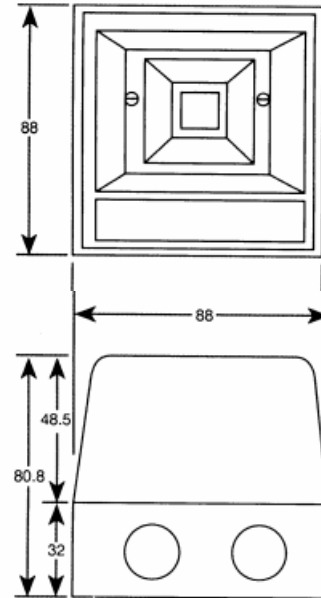

### SPECIFICATION

Voltage Options	Voltage tolerance	Current mA*	Weight Kg.
230 Vac	+/- 10%	13	0.32
115 Vac	+/- 10%	25	0.32
24 Vdc	12-35 Vdc	35	0.25

**\*NOTE:** Sound output and current consumption values are based on the 800 to 1000 Hz alternating signal, the standard UK fire alarm tone. These values will vary for other alarm tones

<b>Sound output *</b>	<b>102 dB(A)</b>
<b>IP Rating</b>	54
<b>IP Rating WR version</b>	65
<b>Alarm tones</b>	32
<b>Alarm Stages</b>	2
<b>Volume Control</b>	18dB(A) adjustment
<b>Cable entry</b>	M20 knockouts
<b>Terminal Capacity</b>	1 x 2.5 mm <sup>2</sup>
<b>Max RH</b>	95% at 40 °C
<b>Op Temp</b>	-25 to +55 °C
<b>Storage temp</b>	-40 to +70 °C
<b>Body Material</b>	ABS
<b>Body Colour Option</b>	Red or white

**APPROVALS: Vds approved version available**

#### **ORDER CODE:**

YO4/Voltage /Base Colour /WR version\*/UL\*  
\*optional

**LGM PRODUCTS LTD**  
**UNIT 18 RIVERSIDE INDUSTRIAL ESTATE**  
**FARNHAM**  
**SURREY GU9 7UG**  
**UNITED KINGDOM**

**TEL + 44 (0) 1252 725257**  
**FAX +44 (0) 1252 727627**  
**E-mail Sales@Lgmproducts.com**  
**www.Lgmproducts.com**